PATH PLANNING CONTROL

by
Malcolm McRoberts
Technical Specialist
Advanced Automation Technologies Department,Advanced Product Development
McDonnell Douglas Space Systems Company, Kennedy Space Center Division
M/S F530, P.O. Box 21233
Kennedy Space Center, FL 32815
Phone: (407) 383-7064 Fax: (407) 269-6205

- **Problem Statement**
  - ¶ **Motion planning for redundant robots in a constrained environment**
- **Current Approaches**
  - ¶ **Model Based**
  - ¶ **Sensor Based**
  - ¶ **Hybrid**

PLANAR MODEL

Task Space

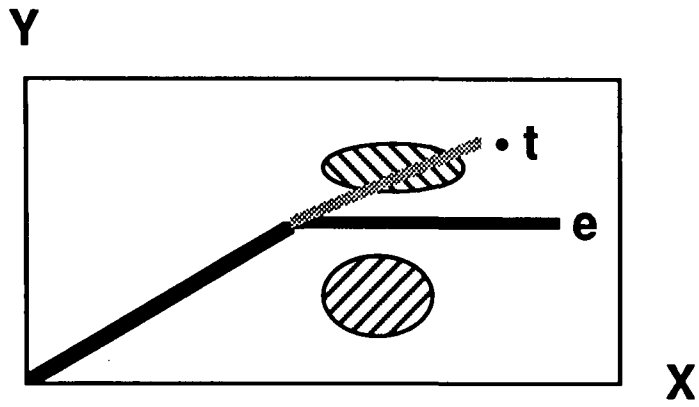

2 Degree of Freedom

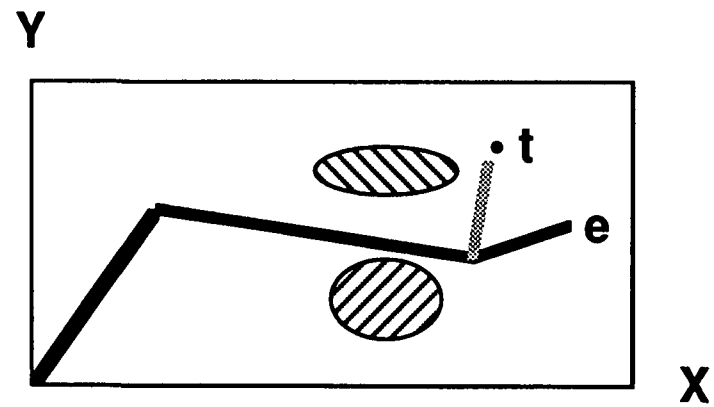

3 Degree of Freedom
(redundant)

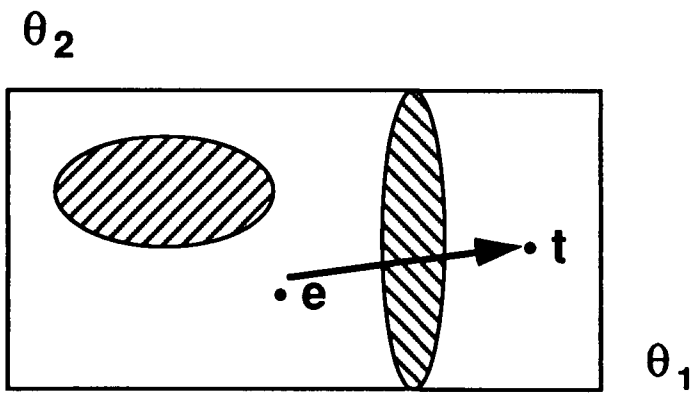

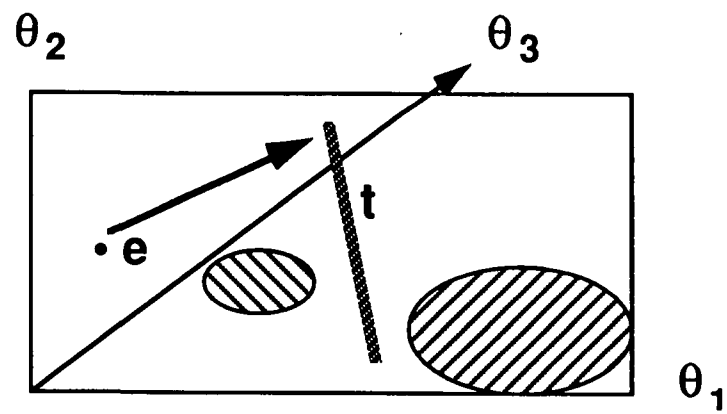

Join Angle Space

APPROACHES

- Model Based Path Planning
  - Uses CAD model (a priori knowledge)
  - Transformations done offline
  - Uses large granularity for efficiency
  - Large search space (exponential in DOF)
  - Environment must be static (i.e. no humans)
- Sensor Based Path Planning
  - Detect obstacles before collision
  - Non-optimal path (may wander)
  - May have very high degree of sensor redundancy
  - Sensors usually located on robot (work in robot space)
- Hybrid Path Planning
  - Best of both worlds
  - Requires fusion of model and sensor information

PROXIMITY SENSOR ARRAY

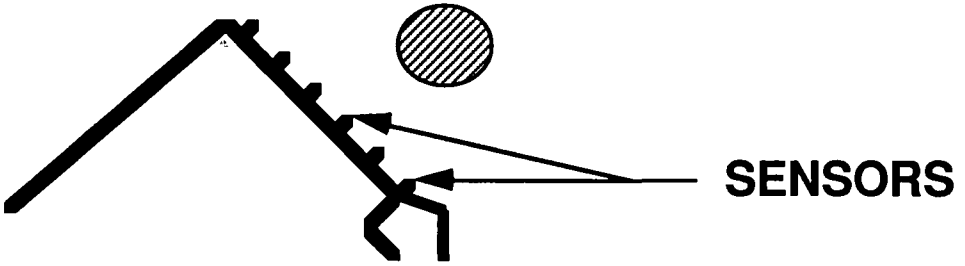

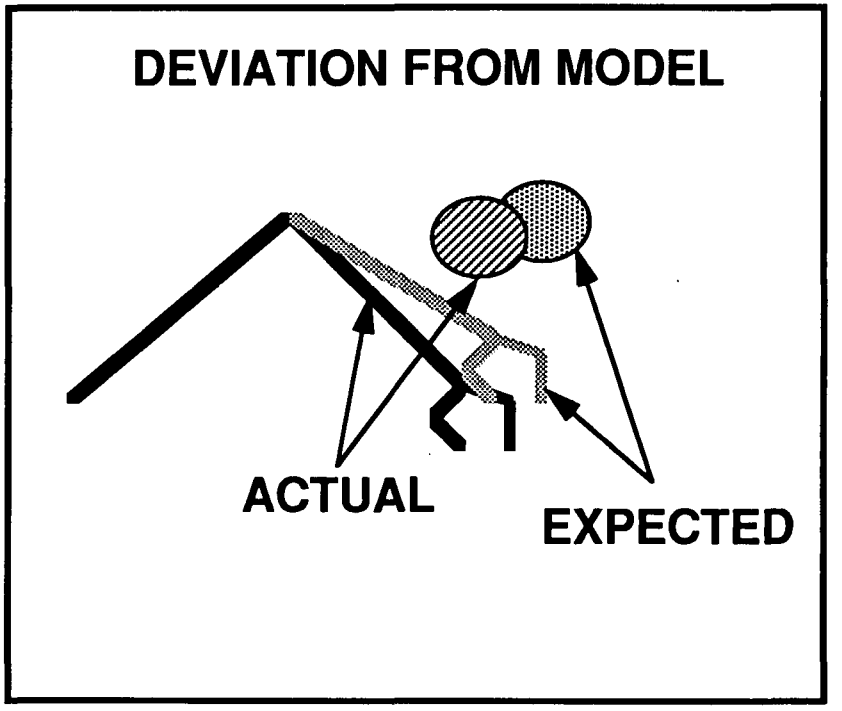

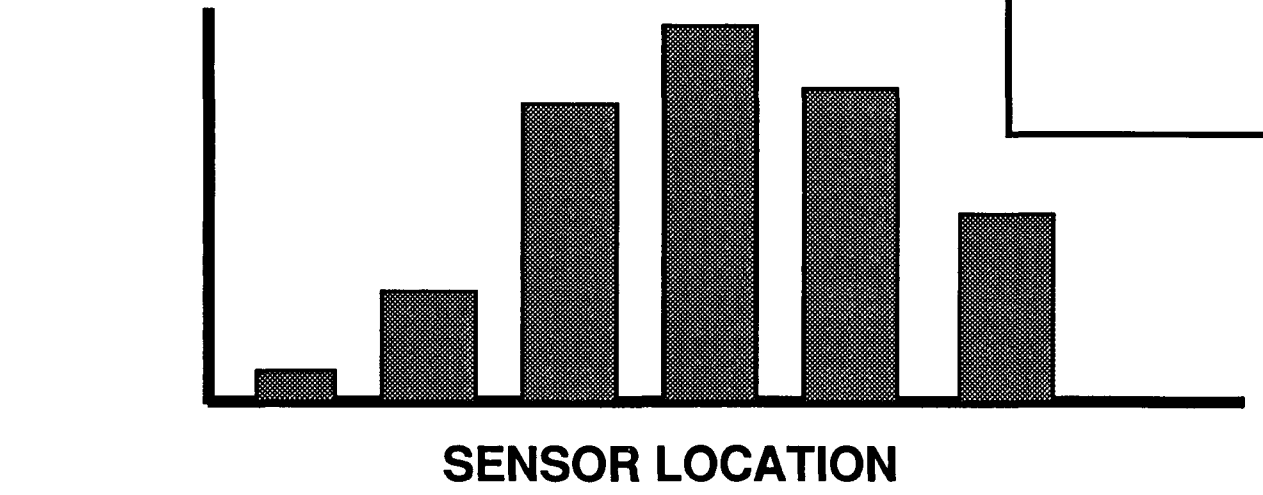

APPLICATIONS FOR FUZZY LOGIC

- Model based
  - No closed form solutions for redundant manipulators
  - Large search space
  - Interpolations between tessellations
- Sensor based
  - Combine redundant information
  - Can calculate approximate range and size of obstacles
  - Optimal path between 2 obstacles
- Hybrid
  - Same as model and sensor
  - Resolving conflicts between model and sensor data

Topic: Path Planning Control
Presenter: Malcolm McRoberts

No notes were taken during this presentation.